



# **Gespage eTerminal Sharp**

Manual





# Table of contents

---

1.	Introduction .....	5
1.1	Compatibility .....	6
2.	Configuration .....	7
2.1	Configuration on the MFP .....	7
2.1.1	Application settings.....	7
2.1.1.1	OSA settings.....	8
2.1.1.2	Authentication activation.....	10
2.1.2	Gespage home page.....	12
2.1.3	Offline mode management .....	12
2.1.4	Period of inactivity .....	13
2.2	Gespage configuration .....	13
2.2.1	General.....	13
2.2.1.1	Global parameters .....	13
2.2.1.2	Licences .....	14
2.2.1.3	Network flows .....	14
2.2.2	Configuration of an eTerminal.....	14
2.2.3	General configuration of the eTerminals .....	16
2.2.4	Advanced parameters of the eTerminals .....	19
2.2.5	Configuring Gespage advanced scans .....	20
3.	Use.....	21
3.1	Examples of user menus .....	21
3.1.1	User login.....	21
3.1.2	Print release.....	25
3.1.3	Choice of billing job.....	27
3.1.4	Gespage home page.....	28
3.1.5	Gespage scan screen.....	29
4.	Annex.....	30
4.1	Adding a “Gespage” shortcut to the home screen .....	30




# 1. Introduction

---

Sharp eTerminal is a Gespage software module dedicated to Sharp MFPs. This module uses the integrated touchscreen of the MFP.

This module enables an authentication at the MFP to provide the following functions:

- Print2me secured print with user authentication (by login / password, PIN code, card) and user-friendly selection of the documents to print.
- Modification of the job properties (print forcing in B&W or color, in duplex or change of the number of copies).
- Scan to me by email, to home directory or to shared directories.
- Payment and accounting of prints on Gespage server (including USB), copies and scans done.
- Access rights to copy, print (B&W, color) functions and scan destinations.
- Management and configuration of the terminal from a user-friendly Web interface.

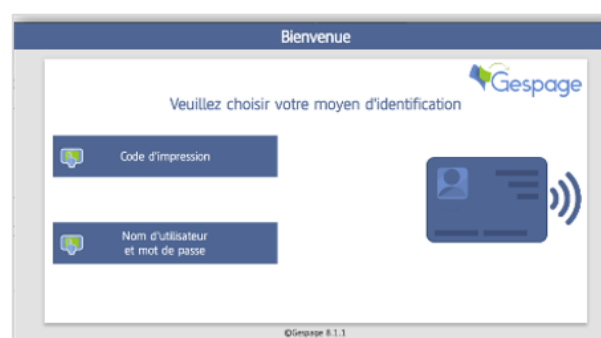

## 1.1 Compatibility

Gepage eTerminal is compatible with all Sharp MFPs fitted with a touchscreen, from OSA 5.5 versions. The MFP must have the AMX3 or BPAM10 and BPAM11 license.

The configuration management of scans through the application Gepage is restricted to MFP Sharp compatible Browser n2.0 or be2.

Sharp eTerminal does not support 480x272 screens present on the non-touch MFPs.

For detailed information about supported models, it is recommended to consult **CartadisDB** tool.

The card readers that can be connected are Cartadis card readers such as TCM3 or TCM4.



# 2. Configuration

---

## 2.1 Configuration on the MFP

### 2.1.1 Application settings

Before configuring the MFP, the printer matching your MFP must first be configured on your Gespage server.

When configuring your MFP via the Web interface, it is recommended to check that the MFP is not turned off or on standby and that nobody is logged in on it.

The web interface of your MFP is accessible by just entering its IP address in your Browser, using the ID « admin » and the password (default is « admin »).

According to the range, the configuration of your MFP can be slightly different.  
Configuration below is detailed for Browser n2.0 and be2.

### 2.1.1.1 OSA settings

A new menu has appeared on the CR4.5 range as well as on the MFP with OSA 5.5 embedded version, or if the AMX2 licence is installed. The configuration below is therefore only valid on this type of MFP.

Once connected as admin, go to “System Settings” tab then “System Control” then Advanced Configuration.

Then you need to display the list then enter the “ID Number” of “Display Setting for Sharp OSA Browser Setting”.

By default, the value is “00001”.

ID	Name
00001	Display Setting for Sharp OSA Browser Setting
00002	Setting of Shortcut Dialog Display upon Inserting External Memory Device



Select “Display” then check “Submit” to save the modification.

**SHARP MX-3071**

Status Address Book Document Operations User Control **System Settings**

System Control  
Job Log  
View Job Log  
Job log Operation  
Data Import/Export (CSV Format)  
Storage Backup  
Device Cloning  
Filing Data Backup  
Storing/Calling of System Settings  
Reset Settings  
E-mail Alert and Status  
Status Message  
Alerts Message  
SMTP Settings  
Advanced Settings

**Display Setting for Sharp OSA Browser Setting**

Submit(U) Back(Q)

Browser Setting

☒ Display  
☐ Not Display

Submit(U) Back(Q)

Still on the Web page, go to “System settings” tab then “Authentication Settings”, you’re directly taken to the page “Default settings”.

**SHARP MX-3071**

Operation Manual Download Sitemap

English

User Name: Administrator Logout

Status Address Book Document Operations User Control **System Settings**

Home Screen Settings Copy Settings Printer Settings  
Image Send Settings Document Filing Settings Sharp OSA Settings  
**Authentication Settings** Common Settings Network Settings  
Security Settings Energy Save  
System Control Image Quality Adjustment Init. Install. Settings

You then need to click on “User authentication” then “activate”, a new line appears in “Settings on authentication server”.

Select the drop-down menu, then click on “SHARP OSA” and finally “Submit”.

**SHARP MX-3071**

Status Address Book Document Operations User Control **System Settings**

Authentication Settings  
Default Settings  
Card Reader Settings  
Condition Settings

**Default Settings**

Submit(U) Update(X)

User Authentication: Enable  
Authentication Server Settings: Sharp OSA



Settings for Using Authentication Information:  
☐ Store User Information  
☐ Cache Authentication Information for External Service Connect

### 2.1.1.2 Authentication activation

The configuration below is to follow for the whole SHARP range.

Before applying the configuration below, please make sure that the multifunction has been added on the print server and appears on the interface of Gespage administration.

Once logged in, go to the tab “OSA Sharp Settings”, then to “External account application settings”.

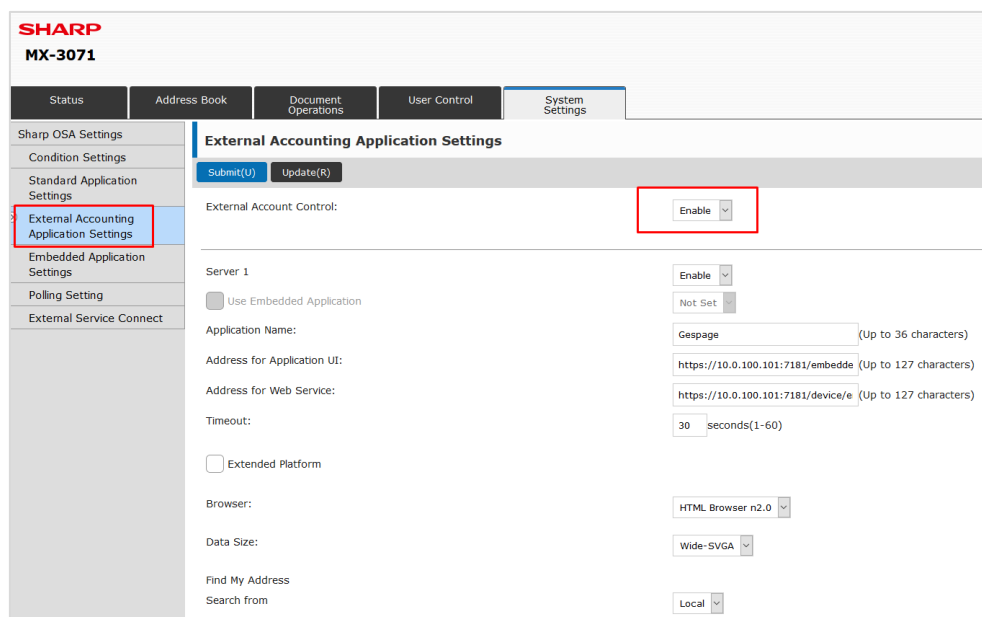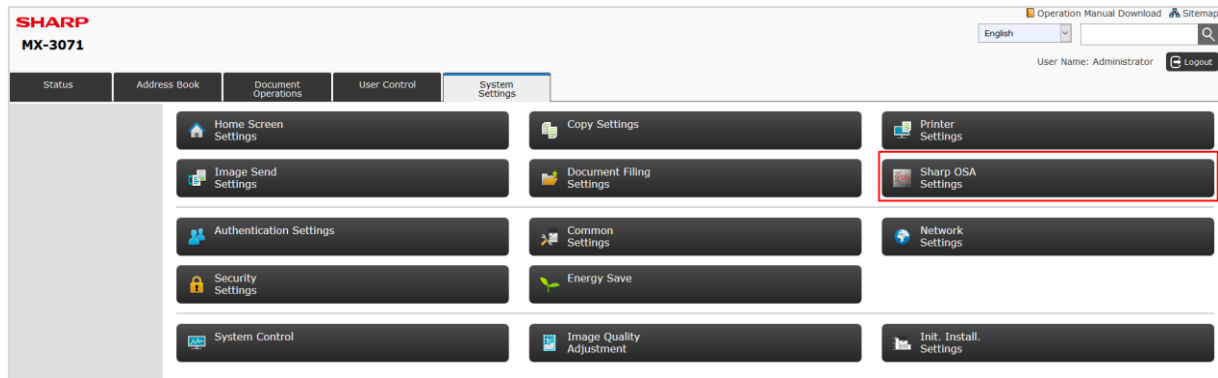

Set “External Account Control” on Enable.

Enable the Server 1.

**SHARP MX-3071**

Status Address Book Document Operations User Control **System Settings**

Sharp OSA Settings  
Condition Settings  
Standard Application Settings  
External Accounting Application Settings  
Embedded Application Settings  
Polling Setting  
External Service Connect

**External Accounting Application Settings**

Submit(U) Update(R)

External Account Control: Enable

Server 1 Enable

☐ Use Embedded Application Not Set

Application Name: Gespage (Up to 36 characters)

Address for Application UI: https://10.0.100.101:7181/embedde (Up to 127 characters)

Address for Web Service: https://10.0.100.101:7181/device/e (Up to 127 characters)

Timeout: 30 seconds(1-60)

☐ Extended Platform

Browser: HTML Browser n2.0

Data Size: Wide-SVGA

Find My Address  
Search from Local

Once the server checked, complete the information linked to the Gespage server:

**SHARP MX-3071**

Status Address Book Document Operations User Control **System Settings**

Sharp OSA Settings  
Condition Settings  
Standard Application Settings  
External Accounting Application Settings  
Embedded Application Settings  
Polling Setting  
External Service Connect

**External Accounting Application Settings**

Submit(U) Update(R)

External Account Control: Enable

Server 1 Enable

☐ Use Embedded Application Not Set

Application Name: Gespage (Up to 36 characters)

Address for Application UI: https://10.0.100.101:7181/embedde (Up to 127 characters)

Address for Web Service: https://10.0.100.101:7181/device/e (Up to 127 characters)

Timeout: 30 seconds(1-60)

☐ Extended Platform

Browser: HTML Browser n2.0

Data Size: Wide-SVGA

Find My Address  
Search from Local

- (1) Set the server on "Activate".
- (2) Give an informative name to the Gespage application (ex: Gespage).
- (3) Enter the address:
  - a. address:
  - b. [https://\(Gespage\\_server\\_address\):7181/embedded/sharp/login-n2-n2.xhtml?id=XXXXXXXXXX](https://(Gespage_server_address):7181/embedded/sharp/login-n2-n2.xhtml?id=XXXXXXXXXX) (for a device compatible with Browser HTML 2.0)
  - c. [https://\(Gespage\\_server\\_address\):7181/embedded/sharp/login-be2.xhtml](https://(Gespage_server_address):7181/embedded/sharp/login-be2.xhtml) where XXXXXXXXXXXX is your MFP's serial number) for a device compatible with Browser HTML n2.0.
  - d. [https://\(Gespage\\_server\\_address\):7181/embedded/sharp/login-be2-n2.xhtml?id=XXXXXXXXXX](https://(Gespage_server_address):7181/embedded/sharp/login-be2-n2.xhtml?id=XXXXXXXXXX) (for a device compatible with Browser HTML 2.0)

- e. [https://\(Gespage\\_server\\_address\):7181/embedded/sharp/login-be2.shtml](https://(Gespage_server_address):7181/embedded/sharp/login-be2.shtml) (where XXXXXXXXXX is your MFP's serial number) for a device compatible with Browser HTML be2.0.

This link provides the display content of the eTerminal Gespage to Sharp MFP.

- (4) Enter the address [https://Gespage\\_server\\_address\):7181/device/embedded/sharp/OSA](https://Gespage_server_address):7181/device/embedded/sharp/OSA) , this link provides the access to OSA Web service.
- (5) Choose your Brower type select n2.0 if your device is compatible 3.5 or n2.0.
- (6) To set the eTerminal display on your MFP screen, you need to select "Wide-SVGA".

## 2.1.2 Gespage home page

On the Web page of the Sharp MFP, the administrator has the possibility to add a Gespage button allowing browsing between the different menus (Gespage and copier menu).

The screenshot shows the 'Standard Application Registration' page in the Sharp MFP web interface. The 'System Settings' tab is selected, and the 'Standard Application Settings' sub-tab is active. The page contains the following fields and options:

- Application Name:** Gespage (Up to 36 characters)
- Address for Application UI:** https://10.0.100.101:7181/embedde (Up to 127 characters)
- Timeout:** 20 seconds (1-60)
- Browser:** HTML Browser n2.0
- Extended Platform:** ☐

Once the configuration validated, the users will have access to a new home menu (see § 3.1.4).

## 2.1.3 Offline mode management

Currently on SHARP, if the server or the network connexion are no longer functional, it is impossible to access to the copier menu.

A mode of operation of MFPs can be activated on the copiers so as to authorize the connexion on **local accounts** to the machine.

It is therefore necessary to create a prior "spare" local account in order to use this functionality.

As a second step, it is now necessary to activate the offline authentication from the Web interface of the copier.

- On an OSA 5.5 copier, under System Settings tab, Authentication Settings.

The screenshot shows the 'Authentication Settings' page in the Sharp MFP web interface. The page contains the following settings:



- Settings for Using Authentication Information:**
  - ☒ Store User Information
  - ☒ Store Password
  - Cache Period: Unlimited
  - ☐ Enable Personalization when external authentication is used
- ☐ Enable Offline Authentication with stored User Information
- ☒ Cache Authentication Information for External Service Connect

- On an OSA 5.0 copier, under User Control tab, Default Settings.

Once network services working again, the MFP will switch in an **automated way** to the application.

## 2.1.4 Period of inactivity

To set the Sharp period of inactivity, go to *System settings/Operational settings*, then fill in the “Return to initial setting” to 60sec.

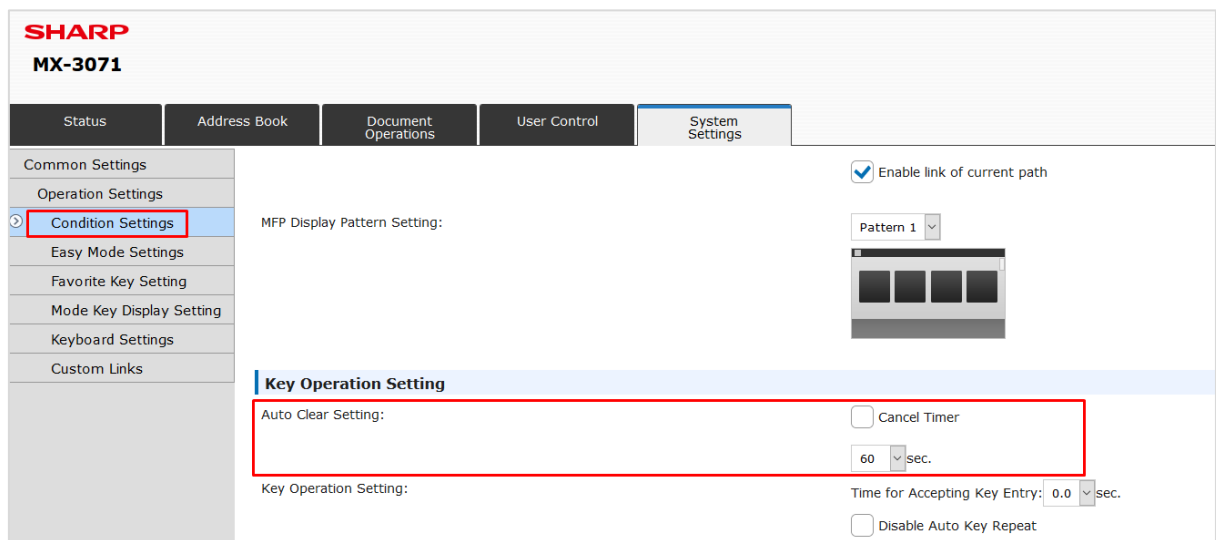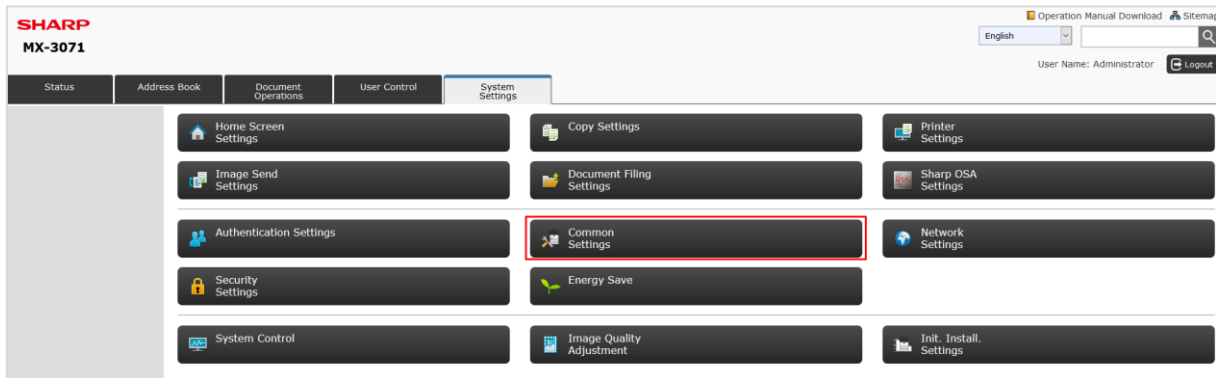

In case of change of reader model, please contact our support.

## 2.2 Gespage configuration

### 2.2.1 General

#### 2.2.1.1 Global parameters

To enable dialogue between the eTerminals and the Gespage server, the address of Gespage server (IP or name) must be checked in the server global parameters (*Server / Global parameters*).

GESPAGE SERVER	
Address of Gespage server	<input type="text" value="10.0.100.26"/>
Port (secured)	<input type="text" value="7181"/>

### 2.2.1.2 Licences

Make sure that the required licences are available. Information about your Gespage Server and the licences bought are available from *Server / Support / Licence*.

An eTerminal can be installed only if you have the Sharp eTerminal licence associated or if your server is in demo mode.

**LICENSE**

Signature HBKASHRM  
Mode Active (under maintenance)  
Maintenance end date 31 juil. 2024  
Qty of printers 100  
Qty of physical printers 28

Terminals	Mode	Details	Date	Number of devices
Konica Minolta eTerminal	Active (under maintenance)		31 juil. 2024	2 / 2
Xerox eTerminal	Active (under maintenance)		31 juil. 2024	2 / 3
Sharp eTerminal	Active (under maintenance)		31 juil. 2024	1 / 100
Ricoh eTerminal	Active (under maintenance)		31 juil. 2024	2 / 5
Lexmark eTerminal	Active (under maintenance)		31 juil. 2024	1 / 5
Kyocera eTerminal	Active (under maintenance)		31 juil. 2024	1 / 5
Brother eTerminal	Trial		31 juil. 2024	1 / 3
HP eTerminal	Active (under maintenance)		31 juil. 2024	1 / 3
Toshiba eTerminal v3	Active (under maintenance)		31 juil. 2024	2 / 10
Epson eTerminal	Active (under maintenance)		31 juil. 2024	2 / 5
Canon eTerminal	Active (under maintenance)		31 juil. 2024	0 / 10

**LICENSE REGISTRATION**

Register your license key  
+ Browse ...  
Approve

To save a new licence, you need to upload and validate it after purchase.

### 2.2.1.3 Network flows

Sharp eTerminal communicates towards Gespage service on TCP ports 7180/7181.

Gespape server communicates towards Sharp eTerminal using port 80.

The network connection between Gespage server and Sharp eTerminal must enable the opening of the outbound link.

## 2.2.2 Configuration of an eTerminal

Sharp eTerminal being automatically registered on Gespage server, you can access by going to *Printer/Terminals/TerminalsList*. Under the "Sharp" tab, you will find your eTerminals.

The screenshot shows the 'General parameters' tab for configuring a Sharp eTerminal. The form includes the following fields and options:

- Name:** sharp\_9512445700
- Serial number:** 9512445700
- Comments:** (empty text area)
- Reader profile:** (dropdown menu)
- Public mode:** ☒ Disabled, ☐ Enabled
- Print job release:** ☒ Manually, ☐ Automatically
- Manual releasing condition:** ☐ All jobs are automatically released after user login, ☒ Jobs are released after a keyboard selection
- Enable Operator release:** ☐
- Enable onboard release options (available by driver):**
  - Change number of Copies:** ☒
  - Force duplex:** ☐
  - Force B&W:** ☐

By clicking on your eTerminal, its features may be changed.

### Name

The eTerminal name must be filled in. The name is free but 2 identical names cannot be entered.

### Comments

Comment of the eTerminal in Gespage. Comments are optional.

### Reader profile

Name of a reader profile associated with the card reader (see Gespage manual).

The reader profile is an advanced parameter useful when non-standard card readers have to be connected or when the numbers of the cards stored on Gespage do not match the standard format.

### Public mode

This parameter enables a “Public” button to be activated on the login screen of the eTerminal for accessing certain MFP functionalities in free access.

#### 1. Disabled

Disables the public mode.

#### 2. Enabled

Enables the public mode.

**ATTENTION:** In addition to this parameter enabling, a Gespage user account must be defined for the definition of functionalities authorized to the public mode (**public** user account to add by default, configurable via the `conf_public_username` advanced parameter).

### Manual releasing condition

This parameter specifies the behaviour in the case of manual release of prints (Print2me).

**1. All jobs are automatically released after a user login**

Once the user is identified, all his printings are released from the queue.

**2. Jobs are released after a keyboard selection**

After user's authentication, a screen shows the user all pending prints and gives him the opportunity to release or delete one by one.

**Enable Operator release**

This parameter enables operator printing at the MFP. Operator printing enables documents of other users to be released for certain authorized users (executive secretary, reprographic service). To set up the operators' accesses at level of users' accounts, please refer to the Gespage manual.

**Parameters for enabling embedded release options (available according to driver)**

The following settings enable release options on the eTerminal.

**These parameters must be set in accordance with the printing policy and the default driver configuration.**

These forcings at the eTerminal level indeed aim to facilitate the selection of printing options for users and avoid them to use the more complex parameters of the driver.

**ATTENTION:** The availability of forcings may depend on the driver.

### **2.2.3 General configuration of the eTerminals**

In the screen of Sharp eTerminals general configuration, set up the parameters to be applied to all Sharp eTerminals on the site.

These parameters are available in *Terminals / General Configuration / eTerminal / Sharp*.



Printers / Terminals / General configuration / eTerminal / Edit Sharp configuration

General parameters    Advanced parameters

### AUTHENTICATION METHOD USED WITH CARTADIS TERMINAL

Allowed logins: ☒ Card and keyboard    ☐ Card only    ☐ Keyboard only

For a card login:

For a keyboard login:

Allow alternative keyboard login: ☐

Use custom soft keyboard: ☐

### CARD ASSOCIATION PARAMETERS

Association card ID to user: ☐ Done by the administrator    ☒ Done by the users

Association type:

### USER SESSION PARAMETERS

View the Gespage home page: ☒

Refresh timer (sec):

Allow pending jobs auto selection: ☒

Action for suspended jobs:

Allow direct and auto print: ☐

### ADVANCED SCANS SETTINGS

File format:

Color Mode:

Resolution:

Single / 2-Sided:

Orientation:

Among these parameters are:

- The type of authorized login.
- The method of cards association
- Configuration information for the application of external accounts.

These parameters are described hereafter:

#### Allowed logins

This parameter is used to select the peripheral for login.

##### **1. Card and keyboard**

The user login can be done by card or keyboard. If no card reader is connected, keyboard login is the only option.

##### **2. Card only**

The keyboard will be disabled. The MFP will only use the card reader peripheral to log the user.

##### **3. Keyboard only**

The card reader peripheral will be disabled. Keyboard login is the only option.

For card login, the Cartadis TCM3 or TCM4 contactless card readers are recommended.



**NOTE:** The card reader has to be directly connected in USB on the MFP.

#### For a card login

1. **Card without password**
2. **Card + password**
3. **Card + PIN.**

#### For a keyboard login

This parameter is used to enter the user login on the keyboard.

<i>Input of Gespage account only:</i>	The user will enter his Gespage login.
<i>Input of account and password:</i>	The user will enter his Gespage login and his password.
<i>Input of the print code:</i>	The user will enter his print code.

#### Allow alternative keyboard login (Input of account and password)

This parameter enables two keyboard login modes to be activated on the MFP at the same time (login enabled by user / password in addition to the print code).

#### Allow pending jobs auto selection

Allows the selection by default of all the pending jobs of the user.

#### Display Gespage Homepage (only compatible for the MFP Browser n2.0)

Displays the Gespage homepage after authentication. It enables intuitive access to printing functionalities and Gespage scan and to Sharp Multifunction menus.

#### Don't show pending jobs if job list is empty

This parameter skips over the Gespage screen of pending prints during login if there is no pending print.

#### Refreshing delay (sec)

The value of this delay must be set on 120 seconds. This delay defines the time beyond which the MFP will automatically close the session in progress if the user remains without activity on the screen of Pending jobs.

#### Action for pending jobs (OSA 4+)

- **Continue:** Printings or copies keep on coming out even if the user is logged out (incompatible with zero stop copy, « Allow direct and auto print » must be set in this mode).
- **Stop:** The printing or the copy stops immediately after logging out but is conserved in the cache of the machine.
- **Stop after the end of the job in progress:** The printing or the copy stops after logging out once the job being released has been printed.
- **Delete:** Identical to « Stop » but without any record in cache.
- **Delete after the end of the job in progress:** Identical to « Stop after the end of the job in progress » but all jobs being launched after on this session will be deleted and not kept in cache.

#### Association card ID to user

At the first user's card use and if the card number is not known by Gespage, a method of association of the card must be defined. It enables the user's card id to be stored in the Gespage account. This association only applies at the first card swipe.

### 1. Done by the users

When a user uses an unknown card, he will have the possibility of authenticating by the keyboard at the login screen. The self-association of the card will be required only once during the card life time.

### 2. Done by the administrator

All the card numbers of the users have to first be configured in Gespage. The initialization can be carried out by the administrator or the LDAP synchronization mechanism.

### Default scan option settings

Among the following choices, these parameters are those that will apply by default to scans:

- **Color:** Whether scans should be colour or black and white by default.
- **Size:** A4 or A3 format.
- **Orientation:** Whether they should rotate 90 ° or not.
- **Resolution:** What resolution they must adopt.
- **Single - Duplex:** Whether they must be single-sided or duplex-sided by default.
- **Type:** What type of file you wish to get, PDF or JPEG.

### Information for the configuration of embedded terminals

This menu is for information purpose. It informs links for the configuration of the external account application in the menus of the Sharp multifunction (see § 2.1).

The links are different if the multifunction doesn't support Browser n2.0, it is therefore necessary to click on the Browser 3.5 button to display the links for this type of browser.

## 2.2.4 Advanced parameters of the eTerminals

General parameters    **Advanced parameters**

SSL communication ☒

Check device certificate ☐

Defined custom welcome logo ☐

Name	Value
The list is empty.	

Delete

**ADD NEW PARAMETER**

Name

Value

Add

Approve

### Allow direct and auto printing

This parameter allows direct printings on the MFP (printings which do not pass through the Gespage hosting server or which are printed in direct without user login).

*Type of keyboard for printing code*

Enables to define the type of keyboard expected for all the Sharp MFP.

*Define a customized home logo*

This parameter enables the customization of the logo displayed on the login page (see the example at [§ 3.1.1](#)). The customized logo is to upload at field Current logo. It must be at format 200x70px.

## **2.2.5 Configuring Gespage advanced scans**

For more information on configuring Gespage advanced scans, you can refer to § "12.3.3 Using scan profiles" of the Gespage manual.

## 3. Use

---

### 3.1 Examples of user menus

The screenshots below correspond to the range compatible Browser n2.0.

#### 3.1.1 User login

The user must authenticate to access to the MFP services. After authentication, the user has a default access to his pending prints, if he wishes to switch to another service, he will only need to click on “Home”.



Disconnection is made via the red button at top right of the Gespage screen or the exit door on the Sharp screen or by passing a card.





When the card login is selected, the logo of the hand with the contactless card appears. If it is absent, this means that the login can only be done by the keyboard.

Home screen with authentication by username and password

The screenshot shows the 'Welcome' screen of the Gespage eTerminal Sharp. At the top, there is a blue header with the word 'Welcome'. Below this, the Gespage logo is in the top right corner. In the center, there is a blue circular icon with a white person silhouette. Below the icon, the text 'LOGIN CREDENTIALS' is displayed. There are two input fields: 'Username' and 'Password'. Below these fields is a blue button labeled 'Approve'. At the bottom of the screen, the text '©Gespape 8.1.2' is visible.

Card login or username and password


The screenshot shows the 'Welcome' screen of the Gespage eTerminal Sharp. At the top, there is a blue header with the word 'Welcome'. Below this, the Gespage logo is in the top right corner. In the center, there is a blue circular icon with a white person silhouette. Below the icon, the text 'LOGIN CREDENTIALS' is displayed. There are two input fields: 'Username' and 'Password'. Below these fields is a blue button labeled 'Approve'. To the right of the input fields, there is a blue icon of a contactless card with a person silhouette and a signal wave. At the bottom of the screen, the text '©Gespape 8.1.2' is visible.

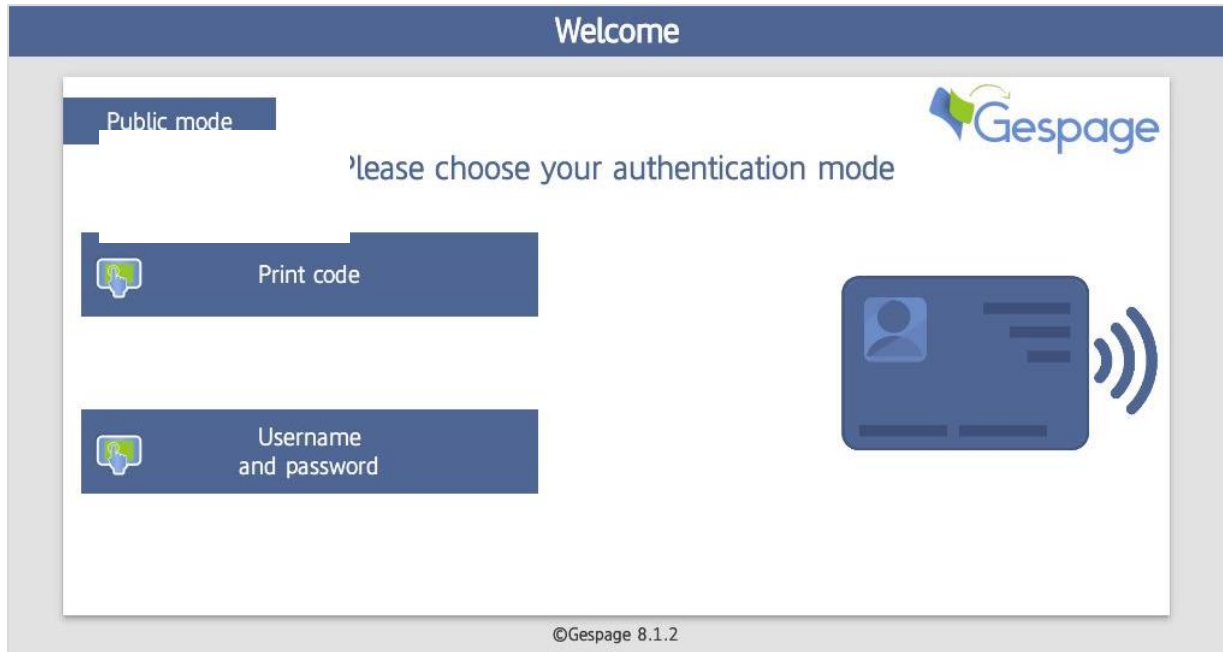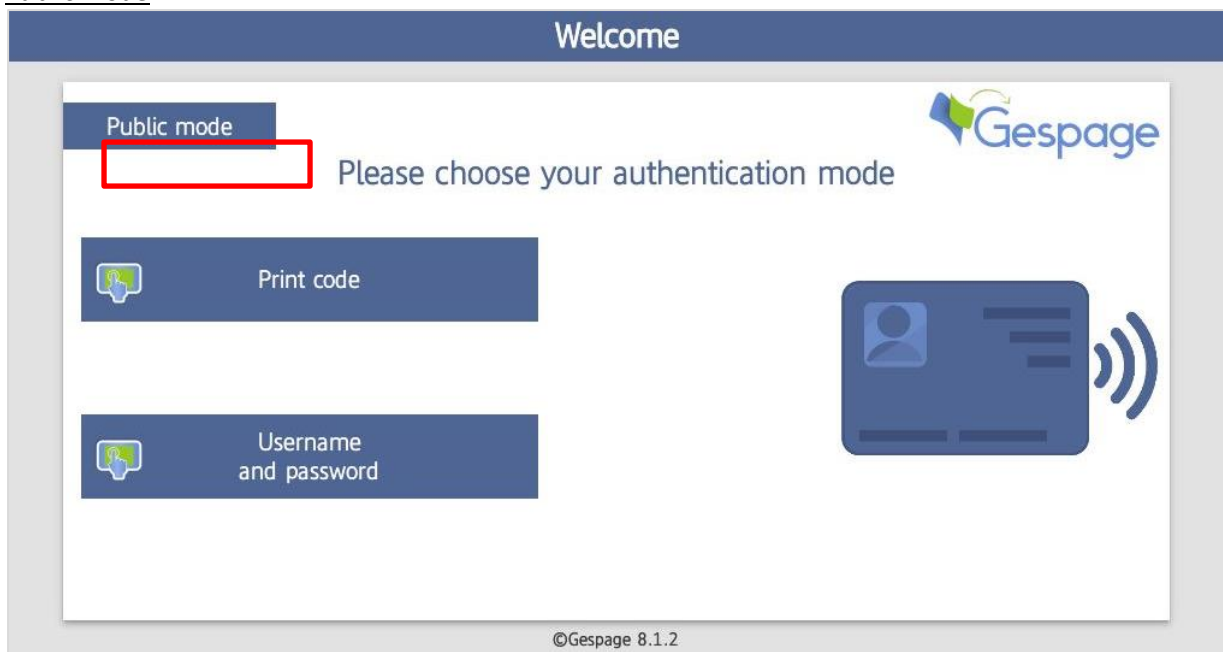Card login, login by print code or username + passwordPublic mode

The public access may be enabled for accessing certain functions of the peripheral without user login (for example B&W copy). It is made by using the *Public Mode* button.

### Home screen with a custom logo

The custom logo is displayed at the top right of the login screen (replacing the Gepage logo).

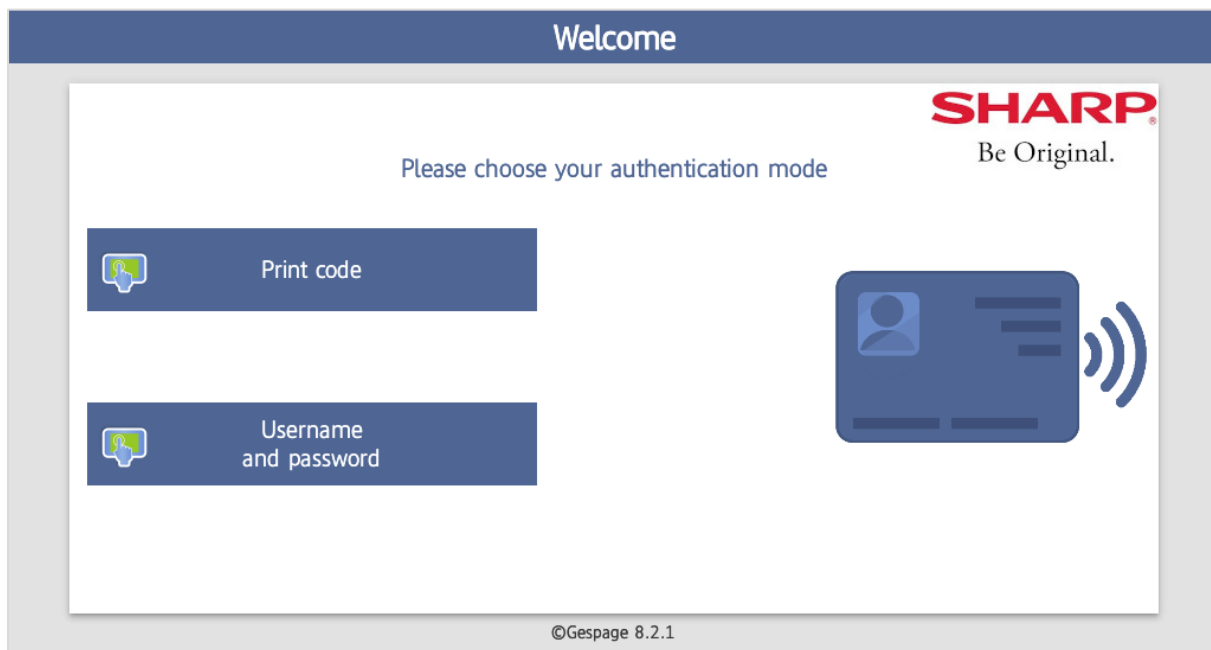

### Card association

If the server configuration provides the association of a card by a user, he must perform a standard login after having passed his new card.





### 3.1.2 Print release

The print release screen enables pending prints to be selected for printing, deletion or modification.

The environmental impact informs the user about the impact of his prints on the environment.

The cost of printing automatically appears at the end of each print line. The total cost is available at the top of the screen.

The page of pending prints may contain a maximum of six print jobs, beyond a paging will be applied. Forcing keys enable the printing to be changed.

#### Pending printings:

The screenshot shows the 'Pending jobs' interface of the Sharp OSA system. The interface includes a header with 'Sharp OSA', 'Admin Login', and 'Job Status'. Below the header, there's a 'Pending jobs' section with a 'Selected : 0/3' indicator and a 'Cost : 0,00 Unités' display. The main area lists three pending print jobs, each with details like file name, time, page count, and cost. To the right, there's a 'Job modification' panel with options for 'Grayscale Forcing', 'Duplex Forcing', and 'Change quantity'. Below this is an 'Environmental impact' section showing CO<sub>2</sub>, OL, and kWh values. At the bottom, there are two large buttons: a red one with a trash icon for deletion and a green one with a printer icon for printing. Red arrows point from text boxes to various elements: 'Job Refreshing' points to the refresh icon; 'To select / deselect pending prints, click on the line wished' points to the job list; 'Billing code selected' points to the 'Job : Commercial' field; 'Modification of the billing code' points to the 'Job modification' panel; 'Modification of the job' points to the 'Job modification' panel; 'Detail of the environmental impact of a (or more) print(s)' points to the 'Environmental impact' section; 'Deletion of the prints selected' points to the red trash button; and 'Printing of the selected documents' points to the green printer button.

Job Refreshing

To select / deselect pending prints, click on the line wished

Billing code selected

Modification of the billing code

Sharp OSA

Admin Login

LINE

PRINTER

Job Status

Pending jobs

Selected : 0/3

Cost : 0,00 Unités

Pauline Le Gras

Quota : 50.00 Unités

Job : Commercial

Job modification

Grayscale Forcing

Duplex Forcing

Change quantity

Environmental impact

CO<sub>2</sub> 0kg

OL

0kWh

Modification of the job

Detail of the environmental impact of a (or more) print(s)


Deletion of the prints selected

Printing of the selected documents


Print screen in operator mode

It is possible to activate for certain users the possibility of releasing the documents of other users (for users of reprographic services or for secretarial positions).

In this case, the name of the user who printed prefix each document.

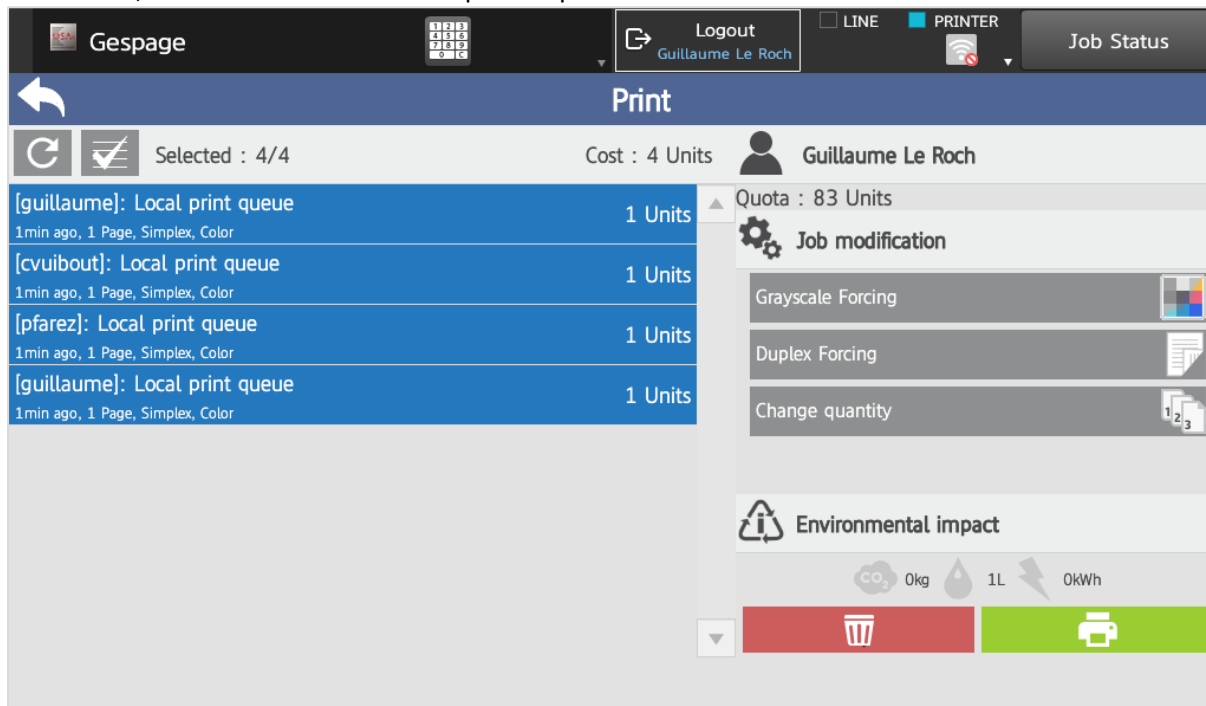Move to copy service

To switch from Gespage homepage to the other services, click on the button "Other".

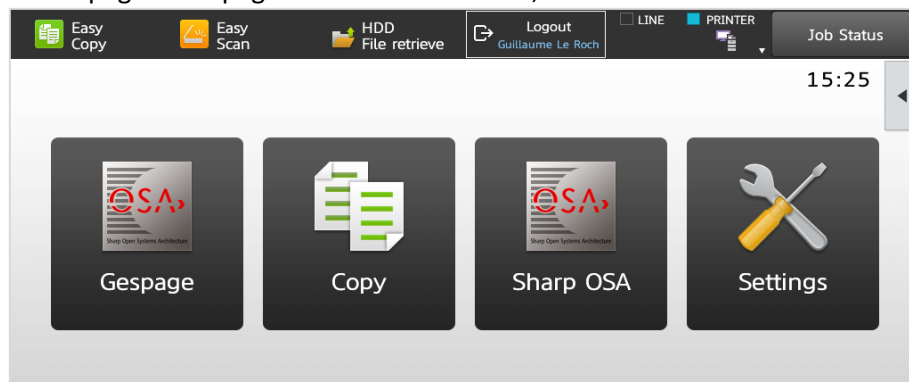

### 3.1.3 Choice of billing job

When configuring your server, if Billing codes (quotas) are used, the user will have to allocate his prints and spending of copy and scan to a billing job.

In this case, after user authentication on the MFP, the choice of billing codes available is displayed.

If the user uses a validation by pop-up on his computer from which he will validate the allocation of his print to his job, this screen will not be shown on the MFP.

Sharp OSA

Admin Login

LINE PRINTER

Job Status

To which job do you want to charge your work ?

Gespage

Filter with the following characters :

Search Reset

Commercial
Droit
Lycée\anglais
Lycée\math
Marketing

©Gespage 8.2.1

HOME

Home button icon

Once the billing job has been chosen, print release, copy and scan will be charged to it.

Guillaume Le Roch

Quota : 83 Units

Job : Commercial


Navigation icons: back, forward, home, search, etc.

The current billing job is identified.

### 3.1.4 Gepage home page

After users login, this page is displayed to facilitate the customer journey.

**NOTE:** This menu must be enabled in the general configuration of Sharp terminals.

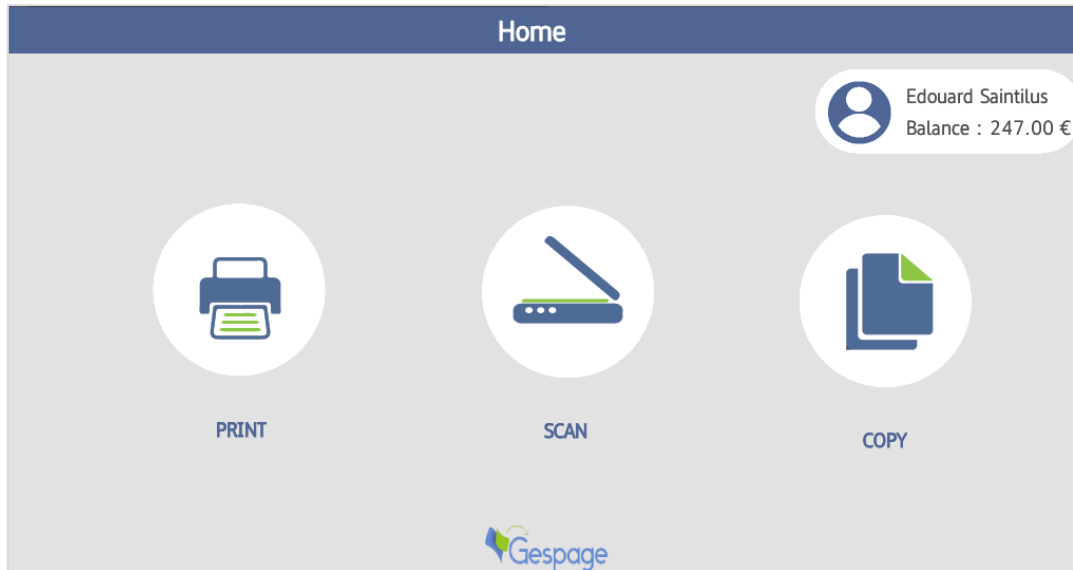


The following options are available to the user:

- "PRINT" button: Redirect to the Gepage print release page
- "SCAN" button: Redirect to the Gepage scan menu.
- "COPY" button: Redirect to the general menu of the MFP.

### 3.1.5 Gespage scan screen

The Gespage scan menu is accessible from the "SCAN" menu on the homepage.

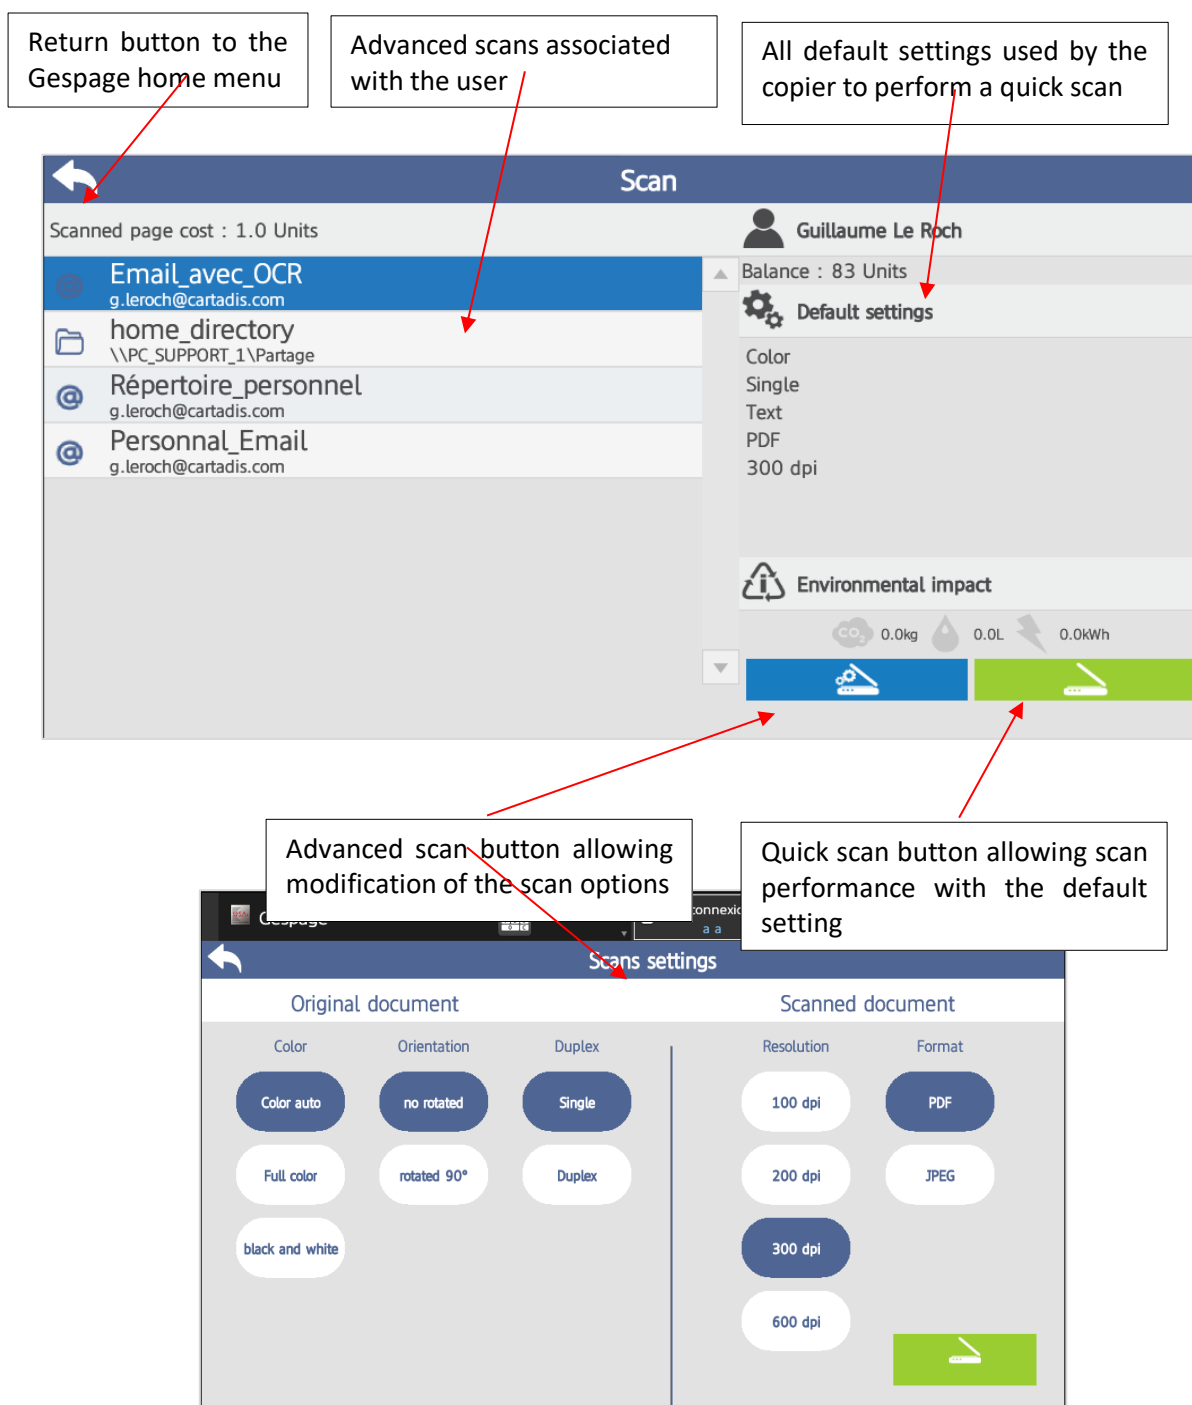

The scan links displayed in this menu depend on the scan parameters configured in Gespage and the user's access rights.

**NOTE:** Several advanced scans cannot be selected simultaneously. Each scan must be launched separately.

## 4. Annex

---

### 4.1 Adding a “Gespage” shortcut to the home screen

To add a quick access to Gespage on the home screen, you'll need to go to *System Settings / Home Screen Settings / Condition Settings* and to select a Home Button to configure:

**SHARP MX-3071**

Operation Manual Download | Site

English

User Name: Administrator | Login

Status | Address Book | Document Operations | User Control | **System Settings**

**Home Screen Settings**

**Condition Settings**

Icon

Background Image

No.	Home Button
1	Not Set
2	Copy
3	Sharp OSA
4	System Settings
5	Not Set
6	Not Set
7	Not Set
8	Not Set
9	Not Set
10	Not Set

Previous(M) 1 / 6 Next(N)

Once selected, go down to “Sharp OSA”, select “Application” and set it to “Gespage”. **Don’t forget to submit the changes!**

To change the shortcut’s icon, head to *System Settings / Sharp OSA Settings / Standard Application Settings* and click on “Gespage” under “Application name”.

Tick the “Use Custom icon” box.

Select the file ‘logo-Gespage-puce-petit.png’ in the following folder:”

C:\ProgramFiles\Gespage\GespageCore\server\resources\medias.

Once again, remember to submit your changes.

The MFP home screen appears as follows:

